



DXc Range

The Morley-IAS DX Connexion panel is ideally suited for use in the protection of small to medium sized buildings. All in all, a compact, high performance, feature rich, economical fire alarm control panel designed to help both the installer and the end user.

The DX Connexion is an enhancement of the Morley-IAS Dimension panel range, connecting the traditional Morley-IAS qualities of reliability, flexibility and value with advanced features and intuitive functionality.

The multi-protocol DX Connexion range of fire alarm control panels has been developed to be the most time efficient fire panel on the market to install. Simply fix the control panel to the wall, connect the field wiring, power up and in as few as five button presses you can have a compliant, working fire alarm system. The panel's large graphical display provides a clear menu structure making the whole initial set-up process quick, clear and intuitive.

Additionally, programming the control panel couldn't be easier. Complex configuration can be achieved by using either the panel's mobile phone style key pad or by using the Windows PC programming tool supplied with the panel.

Protocol Devices

Odyssey

Apollo: Xplorer, XP 95 & Discovery)

Hochiki: ESP

System Sensor: FW 1.3 or newer

USER INTERFACE

Display: 6 x 40 character (240 x 64 pixels). Blue liquid crystal display with backlight illumination

Control Keys: Evacuate, Silence / Resound, Mute Buzzer, Extend Delay, System Reset, Show Alarm Zones

Programming Keys: 12 Button alpha-numeric keypad including cancel & return keys + 4 navigation keys & OK key

Programming Keys: 2 independent programmable function keys & LED indicators

Indicators: Fire, Fault, Disablement, Test, Buzzer, Muted, Delayed Mode, Sounders Silenced, Sounders Disabled & Power. Also dedicated fault LEDs for System Fault, Sounder Fault, Supply Fault & Earth Fault. 40, 80 or 160 LED fire zone indicators optional.

NUMBER OF DEVICES	APOLLO PROTOCOL	HOCHIKI PROTOCOL	SYSTEM SENSOR PROTOCOL
126	✓	✓	-
198	-	-	✓

Total number of devices	198
Sensors	99
MCPs, Modules & AV products	99

PANEL FEATURES

- Disable all relays
- Optional 40, 80 or 160 zone alarm LEDs
- Easy 5 key-press setup
- Large blue LCD display
- Supports USB upload / download
- Supports connection of external printer. Handheld printer (PRINTER-HAND) available separately
- Alpha-numeric style keypad and navigation keys
- Option to upload a company logo
- 160 zone compact mimic support
- Panel buzzer 'mute' in engineering mode
- Up to 72 hours standby
- 3 min inhibit timer function
- Remote LED support
- Level 3 configurable passcode support
- Sounder synchronization
- System IO card support- Pt13 compliant (only with DXc1 & DXc2)
- Fire brigade control & indication panel support (only with DXc1 & DXc2)

NETWORKING FEATURES

- Network up to 16 loops (16 x 1 loop panels, 8 x 2 loop panels, 4 x 4 loop panels or any mix up to max 16 loops)
- True peer-to-peer and fault tolerant network for high system reliability
- BS 5839 Part 1 compliant network

HARDWARE FEATURES

- Battery backed real-time clock (2 & 4 loop)
- 2 independent sounder circuits
- 500 mA multi-protocol loop driver
- 2 onboard monitored inputs
- Optional programmable keyswitch for selected functions
- Plug-in connectors

PANEL FEATURES

- PC configuration software (supplied with panel)
- 160 fire zones (can be used with or without LEDs)
- 7 day timers
- Event logging
- Onboard diagnostics
- Class change function
- Coincidence and verification detection for false alarm management
- Sensitivity adjustment (eg. between day & night)
- Input / output logic
- Enhanced zone support up to 160 LEDs
- Type B dependency
- Alternative zone referencing scheme
- Programming optional language support
- Event logic support
- Remote LED event logic


Output Relays

- Fire Relay: Single pole changeover 24 Vdc 1 A
- Extended: Single pole changeover 24 Vdc 1 A
- Aux Relay: Programmable single pole changeover 24 Vdc 1 A


Onboard Data Ports

- 1 x RS 485 (repeater connection)
 1 x PC programming Port4
 Optional Ports: RS 232 third party protocol interface
 Sounder Circuits: 2 output, 1 A per circuit

MECHANICAL	DXC1	DXC2	DXC4
DIMENSIONS [MM] (H X W X D)	260 x 390 x 147	391.5 x 390 x 147	391.5 x 390 x 147
WEIGHT (EXCLUDING BATTERIES)	4kg	4.5kg	4.5kg
COLOUR	RAL 9002 - Grey white	RAL 9002 - Grey white	RAL 9002 - Grey white
MOUNTING HOLES	3	3	3
KNOCKOUTS (20MM)	Top: 25x Bottom: 2x	Top: 25x Bottom: 4x	Top: 25x Bottom: 4x
OPERATING TEMPERATURE	0°C to +40°C	0°C to +40°C	0°C to +40°C
RELATIVE HUMIDITY	5% - 95% non-condensing	5% - 95% non-condensing	5% - 95% non-condensing
	IP30 (EN6059)	IP30 (EN6059)	IP30 (EN6059)
MATERIAL	Mild steel sheet rear enclosure. ABS plastic front cover to BS EN60950. All displays and controls are carried on the enclosure door.		

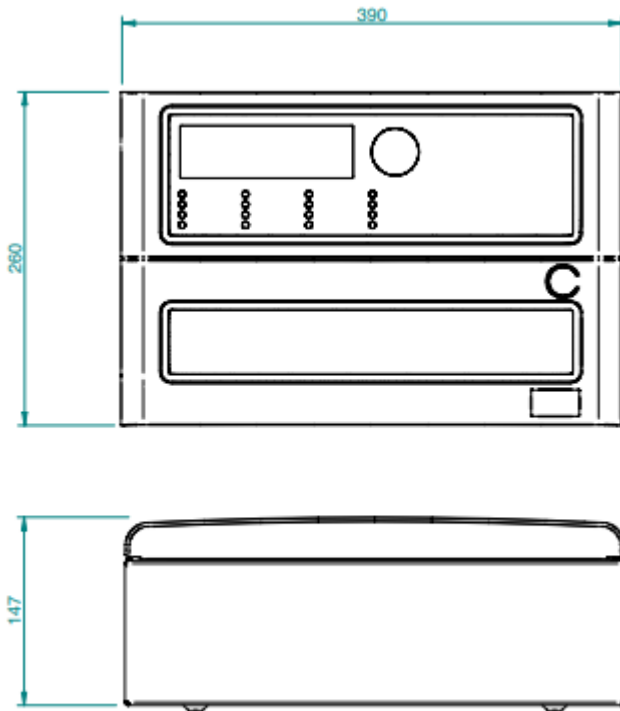


DXC1 / DXC2 / DXC4

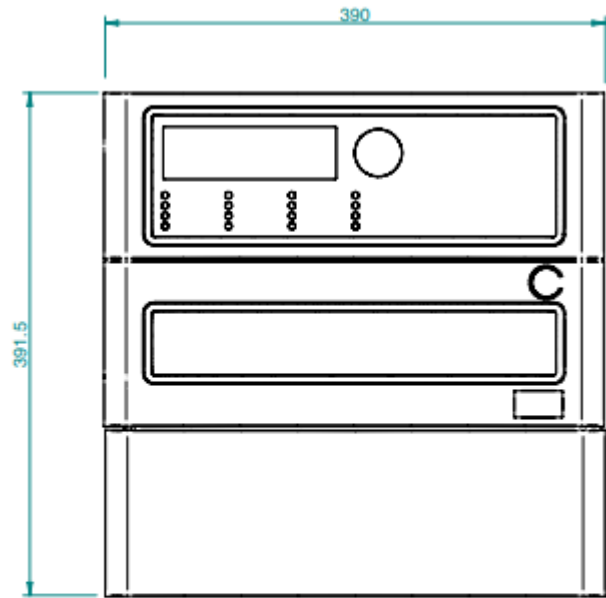

DXC2 / DXC4

ELECTRICAL	DXC1	DXC2	DXC4
OPERATING VOLTAGE	110 / 230V AC +/-15%	110 / 230V AC +/-15%	110 / 230V AC +/-15%
PSU RATING	24V DC 2A	24V DC 4A	24V DC 4A
STAND-BY BATTERIES ³	2 x 7Ah	2 x 17Ah	2 x 17Ah
STAND-BY BATTERY DURATION ³ (BASED ON APOLLO DEVICES)	Stand alone: 24 hours Back-up with either network card or repeater connected	Stand alone: 72 hours With network card or repeater connected: 48 hours	Stand alone: 48 hours With network card or repeater connected: 24 hours
AUXILLIARY OUTPUT ¹	+24V DC 250mA fused	+24V DC 250mA fused	+24V DC 250mA fused

Fault Tolerant Peer-Peer Network

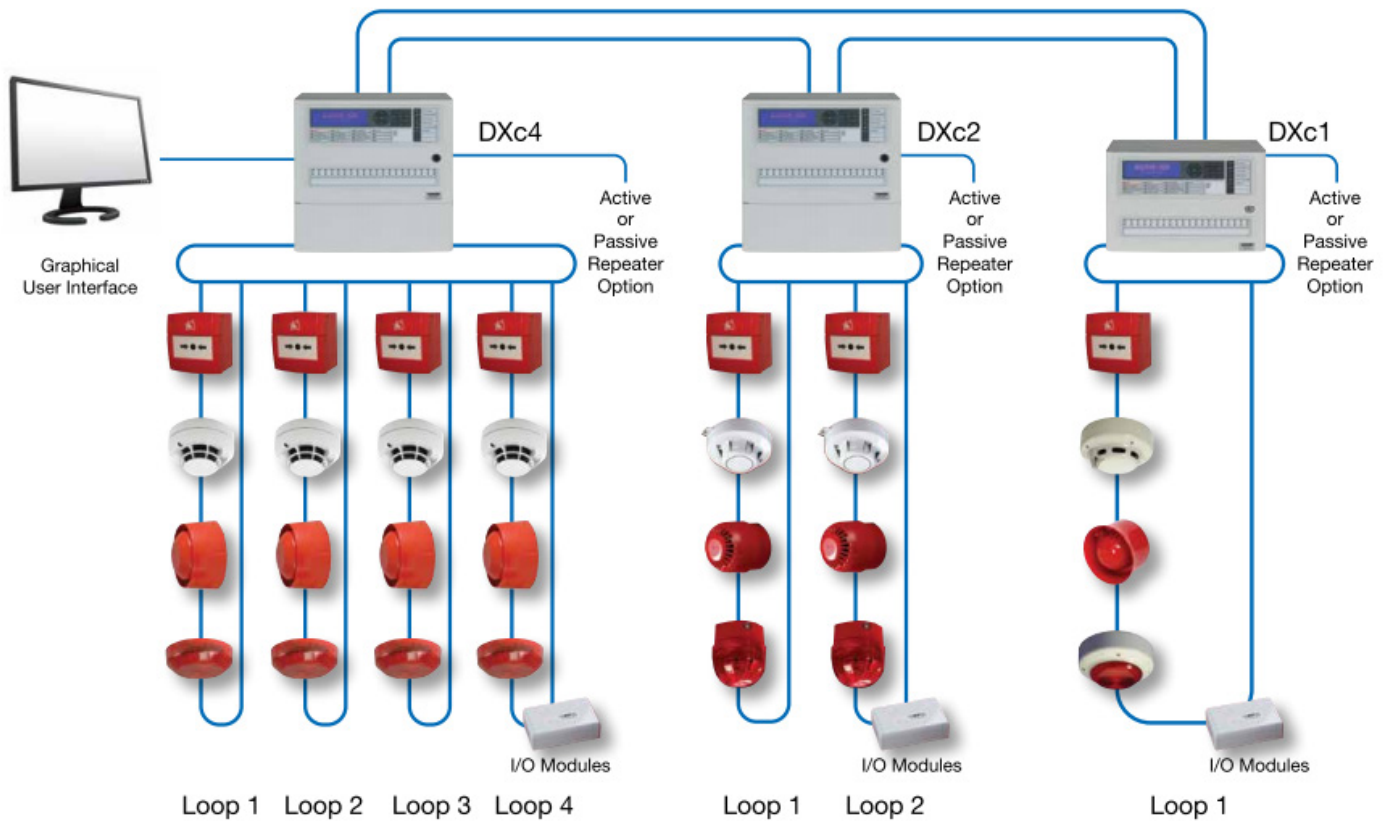

PANELS

- 714-001-111 DXc1 One loop Fire Alarm Control Panel
- 714-001-221 DXc2 Two loop Fire Alarm Control Panel
- 714-001-241 DXc4 Four loop Fire Alarm Control Panel
- 709-601-001 Morley Active Repeater
- 709-701-001 Morley Passive Repeater
- 795-097 Engineers SPK (Software Programming Kit)
- 795-099 Network card
- 795-101 Blank cover kit for Extension Box
- 795-102 40 zone LED card kit
- 795-103 DXc Extension cover, comes with 80 zones LED card
- 795-111 2 loop expansion card
- 795-112 Bezel kit for DXc1 (mm: h:342 x w:471.5 x d:13)
- 795-113 Bezel kit for DXc2/4 (mm: h:473.5 x w:471.5 x d:13)

ACCESSORIES

- 795-114 Bezel kit DXc1 plus Extension Box
- 795-115 Bezel kit DXc2/4 plus Extension Box
- 795-116 Custom keyplate cover for Extension Box
- 795-118 Keyswitch kit
- 795-119 Rack mounting kit DXc1
- 795-120 Rack mounting kit DXc2/4
- 795-121 Extension back box
- 795-122 RS232 Kit (for third party protocol)
- 795-124 80 zone LED card kit
- 797-090 DXc EN54-4 compliant PSU
- 020-909 DXc Compact Mimic
- 020-910 DXc Expansion Mimic PCB
- 020-891 USB isolated upload/download lead PRINTER-HAND External hand-held printer

See price list for AMX graphics options