



Stainless Steel IR3 Flame Detector 16509

The Talentum[®] triple Infra-Red (IR3) Flame Detector is designed to protect areas where open fires may be expected and detects almost all flames, including hydrocarbon fires with 4.3µm emissions through to invisible fires such as hydrogen.

The IR3 Flame Detector is sensitive to flickering, low frequency (1-15Hz) infra-red radiation emitted by flames during combustion even if the lens is contaminated by a layer of oil, dust, water, vapour or ice.

This detector has three IR sensors which respond to different IR wavelengths in order to discriminate between flames and spurious sources of radiation. False alarms from flickering sunlight are avoided by a combination of filters and signal processing techniques.

The Talentum[®] IR3 detector has selectable output options of relay contacts or 4-20mA signal, as standard.

FEATURES

- Excellent immunity to false sources
- Tolerant of fumes, vapours, dust and mist
- Suitable for indoor and outdoor areas
- Unaffected by convection currents, draughts or wind
- Proven response to multiple fuel types
- Multi-spectrum detection
- Selectable output options
- Selectable response speed
- Selectable sensitivity levels
- Built in auto and manual test
- Low current consumption
- Fast response to fire

APPLICATIONS

- Refineries
- Fuel Loading Racks
- Waste Recycling
- Nuclear Power Sites
- Engine Rooms
- Pharmaceutical Production
- Military Applications
- Marine Industry
- Printing
- Aircraft Hangers
- Coal Handling
- Petrochemical Offshore / Onshore
- Compressor Stations
- Chemical Plants
- Tunnels
- Storage Tanks
- Spray Booths
- LNG / LPG Production
- Biomass Storage & Handling

ACCESSORIES

07127 Adjustable Mount Stainless Steel (316)
12545 Stainless Steel Weather Shield (304)
16091 Portable Flame Detector Tester

APPROVALS

Worldwide approvals include EN54:10, with VdS and LPCB certification, as well as SIL 2 rated.

Mechanical Specification

Housing Material	Stainless Steel 316 Housing
Housing Colour	Natural
Dimensions	142 x 108 x 82 mm (H x W x D)
Weight	2.1 kg
Cable Gland Entries	2 x 20 mm
Wiring	1.0 to 4.0 mm ²

Supply Voltage	14 to 30 Vdc
Quiescent Current	8 mA, RL2 energised 4 mA, current loop, RL2 off 3 mA, RL2 off
Alarm Current	28 mA, RL1 & RL2 energised 20 mA, current loop, RL1 & RL2 off 9 mA, RL1 engaged
Power Up Time	2 secs max
Test Signal Voltage	14 to 30 Vdc
Relay Outputs	Normally Open or Normally Closed
- Programmable	Latching or Non-latching
- Ratings: Current	1.0 A max
Voltage	50 Vdc max
Power	30 W max
	(Note: Resistive loads only)

Environmental

Operating Temp	- 10 C to + 55 C
Storage Temp	- 20 C to + 65 C
Relative Humidity	95% non-condensing
IP Rating	IP 66

Performance

Range	- Class 1 - Class 3	0.1 m2 n-heptane at 25 m 0.1 m3 n-heptane at 12m (see EN54: 10 for sens. settings)
Field of View		90 degree min. cone
Op. Wavelength Band-IR		0.75 to 2.7/μm

Approvals


CPR	0832-CPR-0583
LPCB	729a / 01
VdS	G212189
SIL 2	C127 CT003 (2.0)

Response Characteristics - High Sensitivity

Fuel	Flame Size m (ft)	Distance m (ft)	Average Response time (seconds)
n-Heptane* (Yellow flame)	0.3 x 0.3 (1 x 1)	25 (82)	12
Methylated Spirit* (Clear flame)	0.5 x 0.5 (1.6 x 1.6)	25 (82)	25
Hydrogen (non-visible flame)	0.1 x 0.5 (0.3 x 1.6)	12 (39)	8

* has been tested and approved at Class I


Field of View

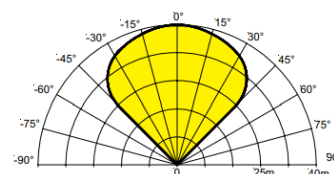

To meet the requirements of EN54:10 clause 5.4, where the ratio of the response points

Dmax: Dmin should not exceed 1.41, the horizontal and vertical viewing angles max should not exceed $\pm 30^\circ$.

Flame Detector

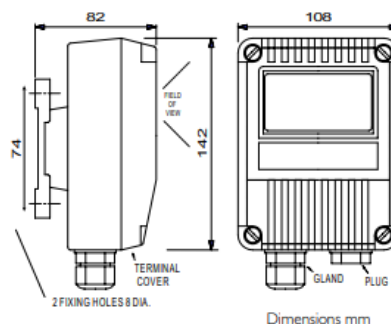

Mounting Bracket

