





Odyssey Intelligent Switch Monitor Module (200-202SA)

The Intelligent Switch Monitor is designed to monitor the state of one or more single pole, volt-free contacts connected on a single pair of cables to report the status. It has a selectable status reporting delay making it suitable for monitoring flow switches.

- Improved design for ease of wiring meaning faster installation
- Contains controllable isolator *
- Address range 1 254 *
- Five pre-configured modes
- Priority mode for fast response *
- Configurable input styles *

* Note: CoreProtocol enabled systems feature only, please check with your system partner for availability.

All data is supplied subject to change without notice. Specifications are typical at 24V, 25°C and 50% RH unless otherwise stated.			
Supply Voltage (Vmin–Vmax)	17 V-28 V dc		
Digital communications protocol	Odyssey compatible 5-13 V Peak to Peak		
Power up surge Quiescent current	900 μA 500 μA		
Max current LEDs On	2mA		
Max current LEDs disabled	500 μΑ		
Operating temperature	- 40°C to + 70°C		
Humidity (no condensation or icing)	0% to 95% RH		
Vibration, impact and shock	EN 54-17:2005, EN 54-18:2005		
IP rating	IP52		
Standards and Approvals	EN 54-17:2005, EN 54-18:2005		
Dimensions	60 mm height x 150 mm width x 90 mm depth		
Weight	239 g		

SPECIFICATIONS

18-20 Stratfield Park, Elettra Avenue Waterlooville, Hampshire, PO7 7XN United Kingdom www.eurotechfire.com VAT No. GB 989775325 | Reg No. 7019670 +44 (0) 203 141 0999 enquiry@eurotechfire.com

Technical:+44 (0) 203 141 0982 technical@eurotechfire.com



MECHANICAL CONSTRUCTION

The Intelligent Switch Monitor (see Figure 1) is available in the new faceplate style enclosure. This can be mounted with the supplied back-box for surface mounting or flush mounted using a UK double gang, flush mounting back-box of minimum depth 30mm.

Table 2: Intelligent Input/Output Unit operating modes*		
1	DIL Switch XP Mode	
2	Alarm delays	
3	Output and N/O input (can be equivalent for Output only)	
4	Output and N/C input	
4	Output with Feedback (N/C)	
6	FailSafe Output with Feedback (N/C)	
7	FailSafe Output without Feedback	
8	Momentary Input Activation Sets Output Relay	
9	Input Activation Sets Output	
* CoreProtocol enabled systems only		

EMC Directive 2014/30/EU

The Intelligent Switch Monitor complies with the essential requirements of the EMC Directive 2014/30/EU, provided that it is used as described in this datasheet. A copy of the Declaration of Conformity is available on request.

Construction Products Regulation 305/2011/EU


The Intelligent Switch Monitor complies with the essential requirements of the Construction Products Regulation 305/2011/EU. A copy of the Declaration of Performance is available on request.

Conformity of the Intelligent Switch Monitor with the EMC Directive, does not confer compliance with the directive on any apparatus or systems connected to them.

Connectivity

Refer to Figures 2, 3 and 4 for unit connection information. Refer to the Installation Guide for the installation instructions on this product. Table 3 details the status indications of this unit, from normal operation through to fault conditions.

Figure 1: Intelligent Switch Monitor dimensional drawing






Table 3: Status Indications				
Legend	LED Status	Description		
Poll/ISOL	Flashing Green	Polling LED		
Poll/ISOL	Continuous Yellow	Isolator LED		
I/P	Continuous Yellow	Input Fault		
I/P	Continuous Red	Input Active		

18-20 Stratfield Park, Elettra Avenue Waterlooville, Hampshire, PO7 7XN United Kingdom www.eurotechfire.com VAT No. GB 989775325 | Reg No. 7019670 +44 (0) 203 141 0999 enquiry@eurotechfire.com

Technical:+44 (0) 203 141 0982 technical@eurotechfire.com



Figure 2: Intelligent Switch Monitor standard resistive monitoring mode connectivity diagram

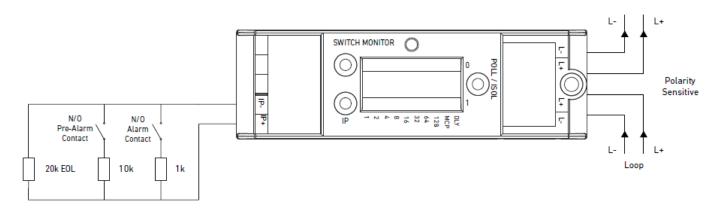


Figure 3: Intelligent Switch Monitor normally open monitoring mode connectivity diagram (compatible with CoreProtocol only)


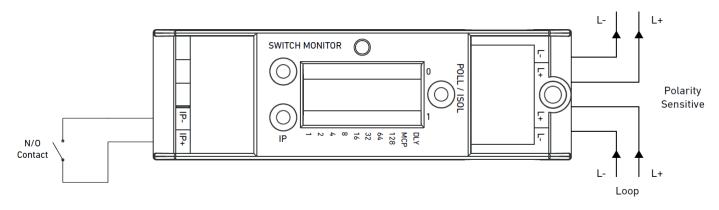


Figure 4: Intelligent Switch Monitor normally closed monitoring mode connectivity diagram (compatible with CoreProtocol only)

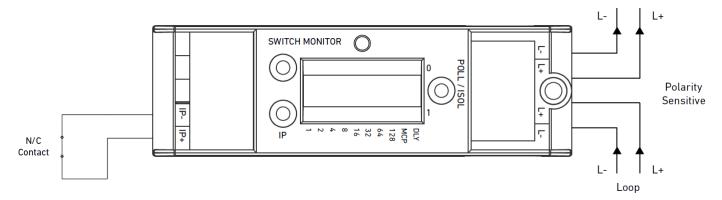

18-20 Stratfield Park, Elettra Avenue Waterlooville, Hampshire, PO7 7XN United Kingdom www.eurotechfire.com VAT No. GB 989775325 | Reg No. 7019670 +44 (0) 203 141 0999 enquiry@eurotechfire.com

Technical:+44 (0) 203 141 0982 technical@eurotechfire.com